

eclipse.

Preparation of printing files

DELIVERY OF DATA


- The data for the production of POS stands should be provided in PDF format in the CMYK
- The resolution of graphics should be at least 300 dpi.
- The PDF file must not contain any hidden layers, Faded wallpaper (Patern), colors that do not print, objects hidden under visible graphics, or unwrapped fonts.
- In case the data contains direct colors (Pantone), the direct color name must be in the print file is precisely defined or otherwise specified in the entry.
- Safety margin: 5 mm (on all sides), this is measured from the data format and prevents your texts and information from being cut off during production.
- Any print must be prepared with 5mm overlap on each side

USED PRINTING TECHNOLOGIES

- Offset CMYK: special colors, varnish
- Digital print CMYK

Color space: ISO coated / Max. color coverage: 320%
Tonal range: 3% - 97%

EXAMPLE FOR DATA PREPARATION

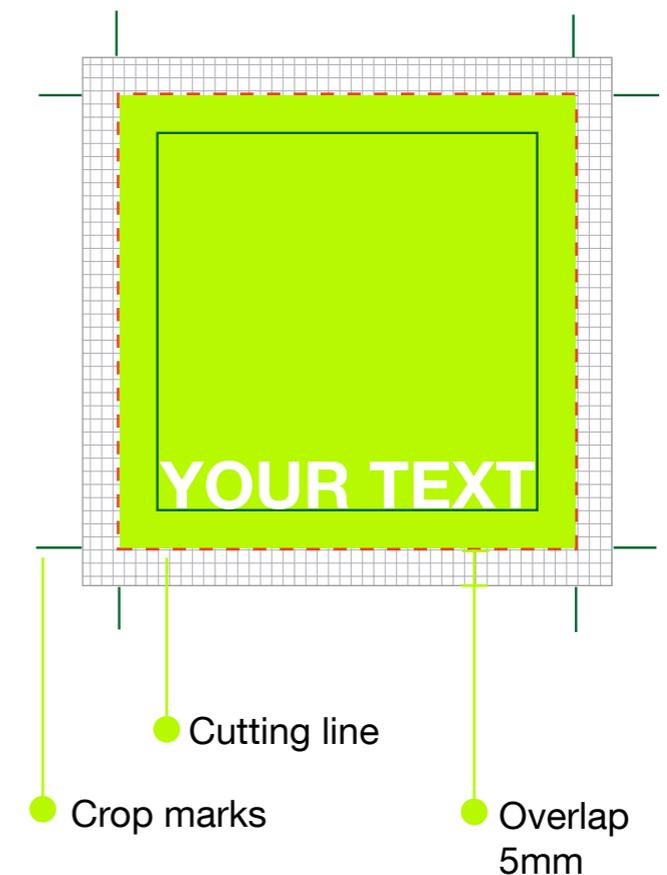

The overlap must be at least 5 mm above the cutting contour.

Correctly prepared PDF with clipping path must always have 3 pages:

- The theme itself
- The cutting line itself
- Theme along with clipping path

We shape the print
www.eclipse-print.de